

LUMINOR™ BLACKCOMB

5.1 / 6.1

CONTROL YOUR OWN WATER QUALITY!

Models: LB5/6-021, LB5/6-031, LB5/6-061,
LB5/6-101, LB5/6-151, LB5/6-201

If you are unsure of the microbiological quality of your source water or if you are looking for additional security from your municipal water source, then LUMINOR has the solution in the BLACKCOMB series of residential UV systems.

UV technology is proven to control microbiological (bacteria & virus) issues in water including *E.coli*, *Cryptosporidium* and *Giardia lamblia*.

BLACKCOMB provides the ultimate in UV protection for your home with the inclusion of a true 254nm Teflon® based UV sensor that continuously monitors the performance of the UV system and displays the output via a colour screen (optional on 5.1 systems). In addition to UV output, diagnostics, system status, warnings, even QR codes are included.

With the integral expandability port, the addition of a 4-20mA output or a solenoid valve is a simple plug-and-play option!

Product Features

- Free floating (no cable twist), keyed-in-place, 254nm Teflon® based UV sensor continuously measures and displays UV output (as a %) (std. on LB6, optional on LB5)
- Colour screen controller with Lightlock™ for protected lamp replacement, includes QR codes, full diagnostics & warnings
- "Future-proof" expandability port for future upgrades and options
- Axial flow, 304 stainless steel polished reactors, designed & manufactured to ASME pressure vessel standards
- User friendly bayonet style lamp connector (quick ¼ turn removal with no extra tools needed)
- Reliable, industry proven, proprietary low pressure coated UV lamps with ceramic bases for durability and long life (9,000 hours)
- Constant current electronic controller (one controller for all LP units) in a splash proof case, fully potted ballast virtually eliminates common water damage issue
- Full customization available as an option (language, home screen, phone number, QR codes, etc.)

Sample Screens




Point-of-Use (POU)

LB5/6-02 series, for flow rates of 8 lpm (2 gpm)
LB5/6-03 series, for flow rates of 11 lpm (3 gpm)

Point-of-Entry (POE)

LB5/6-06 series, for flow rates of 23 lpm (6 gpm)
LB5/6-10 series, for flow rates of 41 lpm (11 gpm)
LB5/6-15 series, for flow rates of 57 lpm (15 gpm)
LB5/6-20 series, for flow rates of 79 lpm (21 gpm)

Typical POE Installation

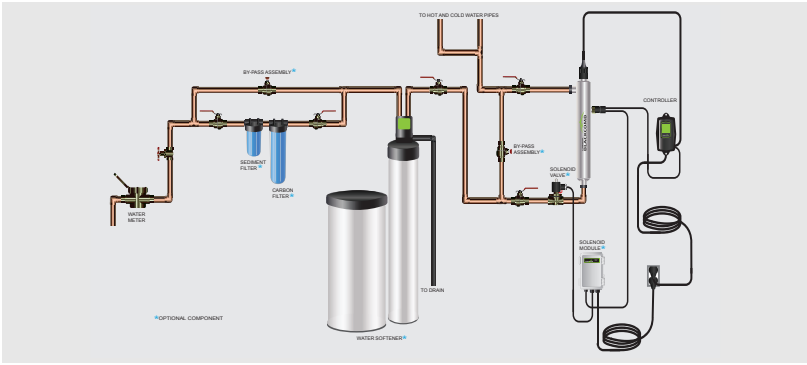

BLACKCOMB 5.1/6.1 SO - Equipment Specifications

| BLACKCOMB (standard-output) | | | | | | |
|--|---|-------------------------------|-------------------------------|-------------------------------|--------------------------------|--|
| Model | LB5-021 LB6-021 | LB5-031 LB6-031 | LB5-061 LB6-061 | LB5-101 LB6-101 | LB5-151 LB6-151 | LB5-201 LB6-201 |
| Flow Rate (30mJ/cm ² @ 95% UVT) | 2 GPM | 3 GPM | 6 GPM | 11 GPM | 15 GPM | 21 GPM |
| | 7.6 lpm | 11.4 lpm | 22.7 lpm | 41 lpm | 57 lpm | 79 lpm |
| | 0.45 m ³ /hr | 0.7 m ³ /hr | 1.4 m ³ /hr | 2.5 m ³ /hr | 3.4 m ³ /hr | 4.8 m ³ /hr |
| Flow Rate (40mJ/cm ² @ 95% UVT) | 1.6 GPM | 2.4 GPM | 4.4 GPM | 8.3 GPM | 12 GPM | 16 GPM |
| | 6.1 lpm | 9.1 lpm | 17 lpm | 31 lpm | 45.4 lpm | 59 lpm |
| | 0.36 m ³ /hr | 0.5 m ³ /hr | 1.0 m ³ /hr | 1.9 m ³ /hr | 2.7 m ³ /hr | 3.6 m ³ /hr |
| Flow Rate (16mJ/cm ² @ 95% UVT) | 4 GPM | 6 GPM | 11 GPM | 20 GPM | 30 GPM | 39 GPM |
| | 15.1 lpm | 23 lpm | 41 lpm | 77 lpm | 114 lpm | 150 lpm |
| | 0.9 m ³ /hr | 1.4 m ³ /hr | 2.5 m ³ /hr | 4.6 m ³ /hr | 6.8 m ³ /hr | 8.9 m ³ /hr |
| Port Size | ½" FNPT | ½" MNPT | ¾" MNPT | ¾" MNPT | 1" MNPT | 1" MNPT |
| Electrical | 90-265V/50-60Hz. / 12VDC / 24VDC as indicated | | | | | |
| Plug Type | American, Nema 5/15, 3 wire for all 110V systems, "1" suffix (i.e. LB5-101) European, CEE 7/7, 3 wire for all 230V systems, "2" suffix (i.e. LB5-102) British Standard, BS 1363, 3 wire for all 230V systems, "3" suffix (i.e. LB5-103) Australian/New Zealand, AS/NZ 3112, 3 wire for all 230V systems, "4" suffix (i.e. LB5-104) | | | | | |
| Lamp Watts | 8 | 15 | 22 | 39 | 50 | 42 |
| Power (Watts) | 14 | 20 | 30 | 49 | 62 | 51 |
| Maximum Current (amps) | 1 | 1 | 1 | 1 | 1 | 1 |
| Replacement Lamp | RL-210 | RL-290 | RL-470 | RL-820 | RL-999 | RL-850 |
| Replacement Sleeve | RQ-210 | RQ-290 | RQ-470 | RQ-820 | RQ-999 | RQ-850 |
| Chamber Material | Polished 304 stainless steel, A249 pressure rated tubing | | | | | |
| Reactor Dimensions | 2.5 x 10.3" (6.4 x 26.2cm) | 2.5 x 14.3" (6.4 x 36.4cm) | 2.5 x 21.3" (6.4 x 54.2cm) | 2.5 x 35.2" (6.4 x 89.5cm) | 2.5 x 40.0" (6.4 x 101.6cm) | 3.5 x 36.1" (8.9 x 91.7cm) |
| Controller Dimensions | 17.2 x 9.2 x 10.2 cm (6.8 x 3.6 x 4") | | | | | |
| Operating Pressure | 7-10.3 bar (10-150 psi) | | | | | |
| Operating Water Temp. | 2-40° C (36 - 104°F) | | | | | |
| UV Monitor | YES on LB6 (optional on LB5), RS-B2.5 | | | | | RS-B3.5 <small>optional on LB5</small> |
| Solenoid Output | YES (but requires optional solenoid module) (MOD-SOL) | | | | | |
| Dry Contacts | YES (but requires optional remote alarm module) (MOD-RAM) | | | | | |
| 4-20mA Output | YES (but requires optional 4-20mA module) (MOD-420) | | | | | |
| Lamp Change Reminder | YES (both audible and visual (full colour graphic)) | | | | | |
| Lamp Out Indicator | YES (both audible and visual (full colour graphic)) | | | | | |
| Shipping Weight | 3.0 kg (6.6 lbs) | 3.3 kg (7.3 lbs) | 4.2 kg (9.3 lbs) | 6.8 kg (15.0 lbs) | 8.0 kg (17.6 lbs) | 7.5 kg (16.5 lbs) |

Manufacturer's Warranty

REACTORS - Ten (10) year Limited Warranty
ELECTRONICS - Three (3) year Limited Warranty
UV LAMPS - One (1) year Limited Warranty
QUARTZ SLEEVES - One (1) year Limited Warranty



See website for LUMINOR's complete warranty document including conditions and exclusions.

Optional Equipment Modules

UV Concierge

Available for WEB, iOS, and Android platforms providing live, dynamic feedback on all features and functions of your UV system.



SHERPA Series Water Quality Monitor

Installs on LUMINOR UV 5/6 systems and allows for remote monitoring of all major and minor alarms that take place on the main UV system. Three LED's visually display system functionality from up to 150' (46m) away.



Custom Dealer Programmer

Customize your UV controller with your own company name, logo, website, QR code and contact information. Capture the lucrative replacement lamp market by creating a direct link back to your own website!



UV Sensor Module

Allows the 254nm UV wavelength to be measured and displayed via the controller. The sensor plugs directly into the controller and is mounted in the sensor port located on all reactors. (see chart for part numbers)



Solenoid Module

Used to power a remote normally closed solenoid valve (not included). Solenoid will close on lamp failure or when low UV conditions are detected by the sensor. Available in 110V. (MOD-SOL1) or 230V. (MOD-SOL2)



TRV (temperature management relief valve)

TRV allows for a small amount of water to be physically released (dumped) from the UV unit to allow for cooling of the water. Used in applications of extended "no flow" conditions, or when the temperature of the treated water is of a critical nature.



4-20mA Module

Used for signal transfer to a remote device such as a data logger or computer. Order MOD-420.



Remote Alarm (Dry Contact) Module

Used for signal transfer to a remote alarm or dry contacts. Order MOD-RAM.



LUMINOR Environmental Inc.
 80 Southgate Drive, Unit 4
 Guelph, Ontario, CANADA
 N1G 4P5

www.watertiger.com
 (604) 630-1114



Watermark
 Certification
 Available



EPA Establishment
 #088776-CAN-001



Carbon
 Neutral



Water
 Quality
 ASSOCIATION



LuminorUV



LuminorUV